

CAAV

WING INSTALL


*Left handed unit used for
Instructions - right will be opposite*

Recommended tools




4MM ALLEN WRENCH
5MM ALLEN WRENCH

Hardware enclosed




**NOTE: all screws provided must be
installed for proper installation and
compliance with product warranty.**

CHAIR WITH SCREEN:
CONNECTOR BOLTS
ARE PRE-INSTALLED
ON PANEL

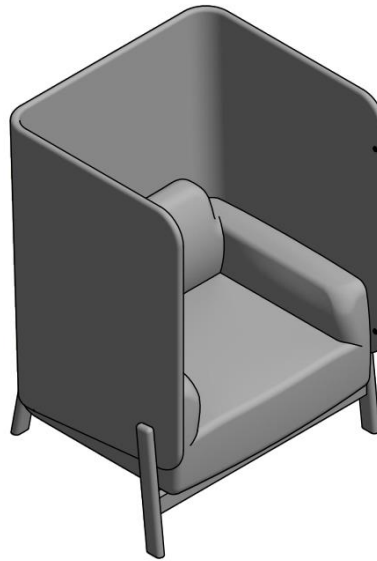

WING WILL COME
WITH H-BRACKETS
PRE-INSTALLED


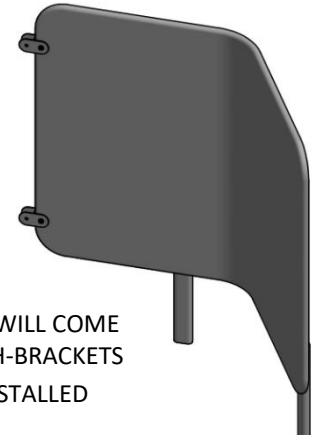


UNIT WILL COME PACKED IN 2 BOXES:

- 1ST box will contain the chair with screen
- 2nd box will contain the wing

STEP 1:

- Use the 4mm and 5mm allen wrenches to remove the connector bolts from the chair screen only – do not remove the connector bolts from the wing

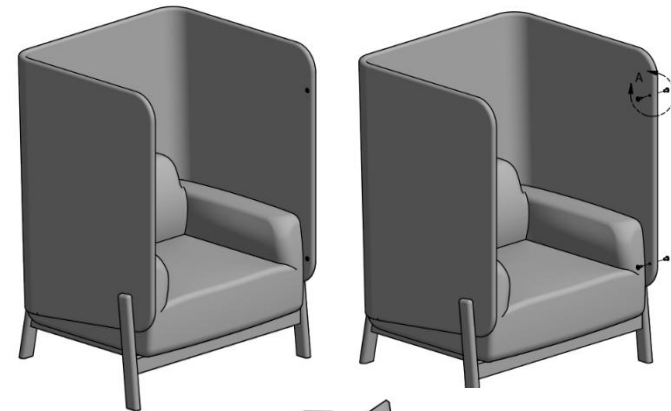

DETAIL A

CAAV

WING INSTALL

Left handed unit used for
Instructions - right will be opposite

Recommended tools




4MM ALLEN WRENCH
5MM ALLEN WRENCH

Hardware enclosed




STEP 2:

- Slide wing “H-Brackets” over end of the screen
- Align holes in the “H-Brackets” on the wing with the holes in the screen (where the connector bolts had been removed)

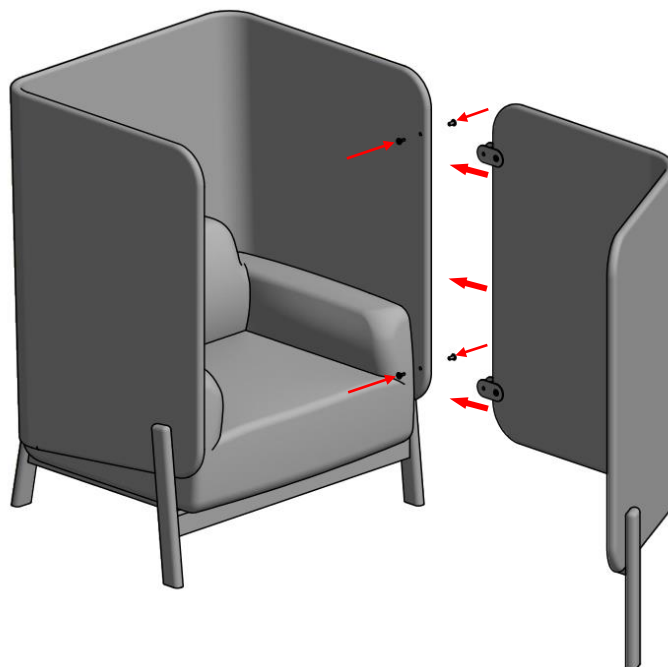

STEP 3:

- Insert the connector bolts thru each side of the “H-Bracket” and start threading the bolts by hand until both sets are started.
- Snug down the bolts using the 4mm and 5mm allen wrenches. DO NOT OVER TORQUE. There will a slight amount of play between the bolt heads and the bracket to prevent damage to the bracket finish.
- Properly level unit using the leveling glides
- Install complete.

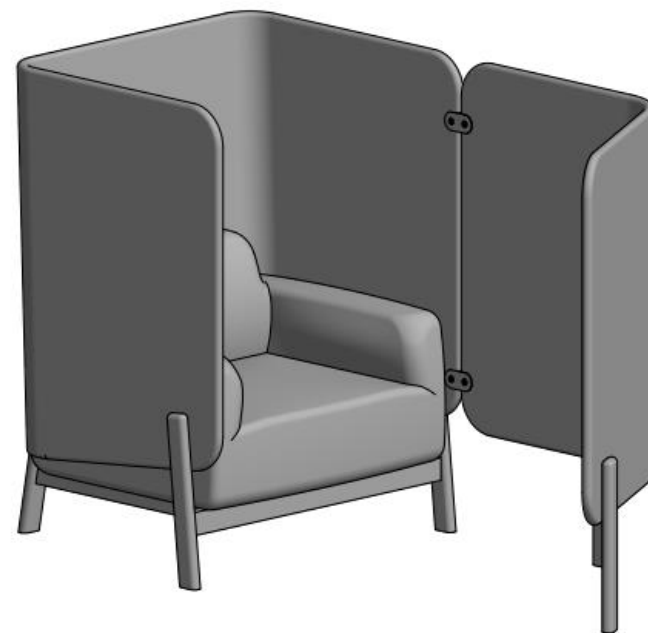

NOTE: all screws provided must be installed for proper installation and compliance with product warranty.